

ABOX-5221(P)(G)-IP66 Series

*Intel® Core™ Series 2 Processors with Discrete GPU Options,
High-bandwidth 10GbE and IP66 Edge AI Computer*



- Intel® Core™ Series 2 Processors
- NVIDIA RTX™ Embedded and Intel® Arc™ GPU Options for Scalable AI Accelerating Solution
- 2 x Marvell 10GbE for High-Bandwidth Uplink and Aggregated Downlink Connection
- 4 x 2.5GbE with PoE+ Option Provides Simplified Connection to Edge Devices
- Front Removable RTC Battery Design for Easy Maintenance
- IP66 Ingress Protection

Specifications

System

Processor

- Intel® Core™ 9 Processor 273PTE
- Intel® Core™ 7 Processor 251TE
- Intel® Core™ 5 Processor 221TE

Graphics

- Processor-integrated GPU - Intel® UHD Graphics 700 Series
- Optional discrete GPU - NVIDIA RTX™ Embedded 2000 Ada / 3500 Ada / 5000 Ada Intel® Arc™ A370E

Chipset

- R680E

Memory

- 2 x DDR5-5600 SO-DIMM up to 96 GB (ECC support with ECC DRAM)

Security

- TPM 2.0

Watchdog

- Auto reset for unresponsive system (custom 1-255 sec/min settings in BIOS)

Interface

Video

- 2 x HDMI® up to 3840 x 2160 @ 60Hz as specified in HDMI 2.0b

Ethernet

- 2 x 10GbE (Marvell AQC113) via M12 X-code
- 4 x 2.5GbE (Intel I226IT) via M12 X-code

* ETH3 supports Intel® AMT

** PoE supports 25.5W per port with total power budget: 120W

USB

- 2 x USB 3.2 Gen 2

DIO

- 8 x DI (DC 5-60V), 8 x DO (DC 5V/100mA) via M12 A-code

COM

- 2 x RS-232/422/485 via M12 A-code

Internal Expansion

M.2

- 1 x M.2 3042/3052 Key B for WWAN w/ dual Nano SIM support
- 1 x M.2 2230 Key E for Wi-Fi/BT, GNSS, or CAN Bus module

* Thermal solution is required for M.2 5G module.

Mini PCIe

- 2 x Mini PCIe (full-size)

Storage

Storage Type

- 1 x M.2 2280 Key M for NVMe/SATA SSD
- 1 x M.2 2280 Key M for NVMe SSD
- 2 x 2.5" SATA SSD

Certification / Compliance

- CE, FCC Class A, UKCA, E-Mark, EN 50155, EN 45545-2 (R25), EN 62638-1

Power

Power Input

- DC 18-60V (nominal power input DC 24V/48V) via M12 K-code

Power Protection

- OCP, OVP, surge protection, reversed polarity protection

Power Management

- Ignition detection, Smart Power Management

RTC Battery

- Removable front tray for coin cell battery

Battery Backup Unit (BBU)

- Optional battery kit for up to 10 minutes emergency backup time (Battery charging Temp. 0°C ~ 45°C and discharging Temp. -10°C ~ 60°C)

* BBU backup time varies depending on actual overall system power consumption and battery is required to be charged before being used for system power backup

** Operating temperature will be limited within -10°C and 60°C with the battery kit installed.

Patent No.: M447854 (Built-in battery)

Software

Operating System

- Windows 11 IoT Enterprise LTSC
- Ubuntu 26.04 LTS

Environmental

Operating Temp.

- -40°C ~ 70°C (-40°F ~ 158°F) with 0.6 m/s airflow

* Operating temperature varies by accessories installed.

Storage Temp.

- -40°C ~ 80°C (-40°F ~ 176°F)

Relative Humidity

- 10% RH ~ 90% RH (non-condensing)

Vibration

- IEC 60068-2-64, random, 2.5G@5~500Hz, 1hr/axis
- MIL-STD-810H, Method 514.8, Procedure I, Category 4

Shock

- MIL-STD-810H, Method 516.8, Procedure I, trucks and semi-trailers=15G (11ms)

Mechanical

Construction

- Aluminum alloy

Antenna

- 7 x SMA connector mounting hole

Mounting

- Wall mounting

Net Weight

- 6 kg (13.23 lbs)


Dimensions (L x W x H)

- 290 x 253.5 x 101.5 mm (11.42 x 9.98 x 4 in.)

Ingress Protection

- IP66

Dimensions

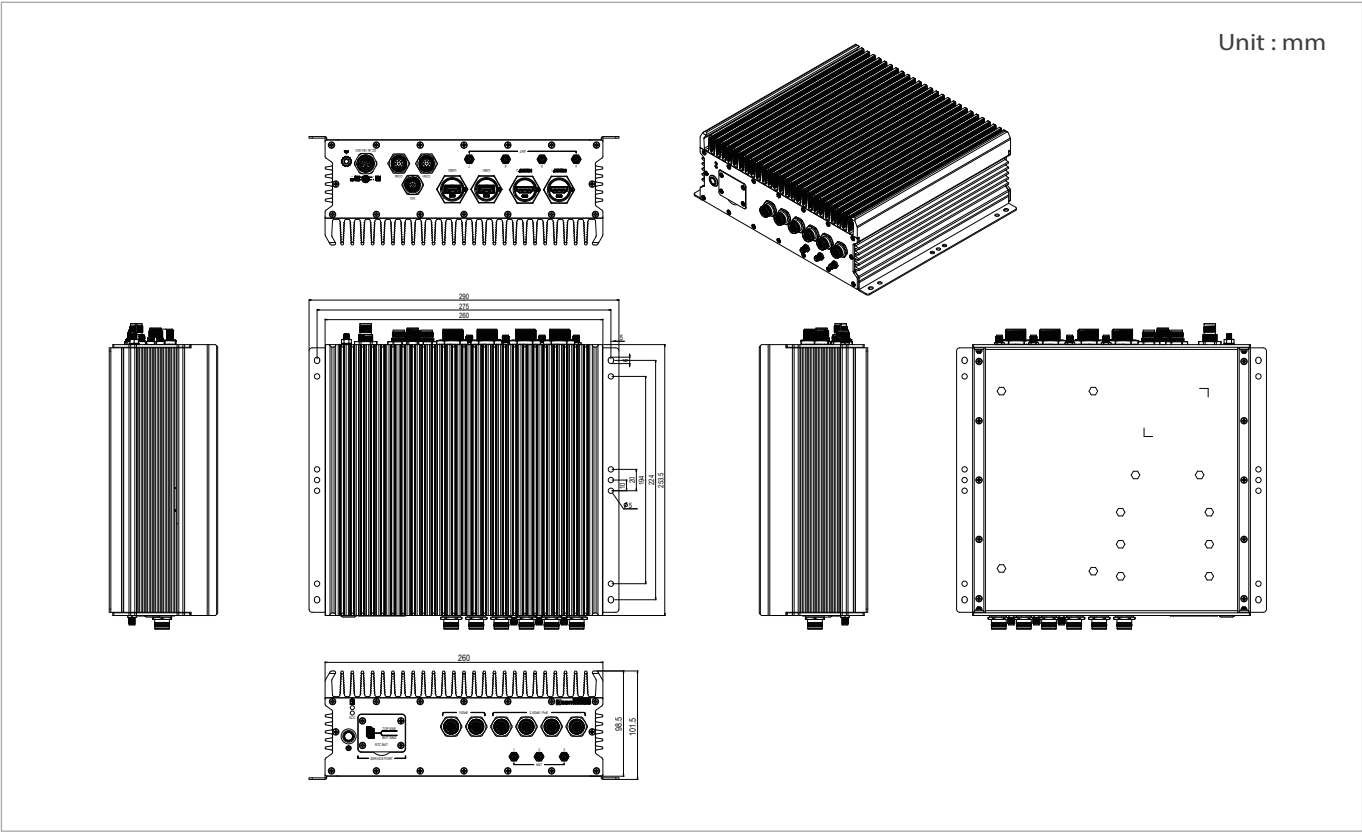

Ordering Information

Model Number	ABOX-5221(P)(G)-IP66-zzzzz (P= w/ PoE, G=w/ Discrete GPU, zzzzz=273PTE=Intel® Core™ 9 273PTE, zzzzz=251TE=Intel® Core™ 7 251TE, zzzzz=221TE=Intel® Core™ 5 221TE
Description	Intel® Core™ Series 2 Processors with Discrete GPU Options, High-bandwidth 10GbE and IP66 Edge AI Computer
State of Origin	Made in Taiwan

Optional Discrete GPU

Discrete GPU	Graphic Cores	Memory Type/Size	AI TOPS*	System Operating Temp.
NVIDIA RTX™ Embedded 5000 Ada Generation	9728 CUDA / 304 Tensor	GDDR6 16GB	682	0°C ~ 60°C
NVIDIA RTX™ Embedded 3500 Ada Generation	5120 CUDA / 160 Tensor	GDDR6 12GB	369	0°C ~ 60°C
NVIDIA RTX™ Embedded 2000 Ada Generation	3072 CUDA / 96 Tensor	GDDR6 8GB	232	0°C ~ 70°C
Intel® Arc™ A370E	8 X ^e -cores / 128 Execution Units	GDDR6 4GB	56	0°C ~ 70°C

*AI TOPS Precision - FP8 for NVIDIA RTX™ Embedded Ada Generation, INT8 for Intel® Arc™.

Optional Accessories

Memory	DDR5-5600 SO-DIMM, 8 GB to 48 GB, -40°C ~ 85°C (ECC option available)
Storage	M.2 2280 Key M NVMe SSD w/ thermal kit, -40°C ~ 85°C M.2 2280 Key B-M SATA SSD w/ thermal kit, -40°C ~ 85°C 2.5" SATA SSD, -40°C ~ 85°C
Wi-Fi	M.2 2230 Key A-E Wi-Fi module, -40°C ~ 85°C
WWAN	M.2 3042/3052 Key B WWAN module w/ thermal kit, -40°C ~ 85°C
GNSS	M.2 2230 Key A-E GNSS module, -40°C ~ 85°C M.2 2242 Key B GNSS module, -40°C ~ 85°C Mini PCIe GNSS module, -40°C ~ 85°C
CAN Bus	M.2 2242 Key B CAN Bus module, -40°C ~ 85°C Mini PCIe CAN Bus module, -40°C ~ 85°C
Battery (BBU)	BAT-5200 battery kit, charging Temp. 0°C ~ 45°C, discharging Temp. -10°C ~ 60°C
Power Adapter	AC/DC 100-240V/24V 280W C14 bare wire power adapter

All specifications are subject to change without notice.